




## Thin, flexible, clip-around 3 phase ac current transducer

# RCTi<sup>®</sup>-3ph

The **RCTi-3ph** is an industrially specified ac current transducer for permanent installation. The coil sensors are thin, lightweight, flexible and clip-around. The output for each phase is an instantaneous voltage proportional to the measured current.

Typically the **RCTi-3ph** is used with oscilloscopes, data acquisition cards, power analyzers and meters and in power quality applications.

The **RCTi-3ph** is an ideal replacement for medium / large current, current transformers (CT's).

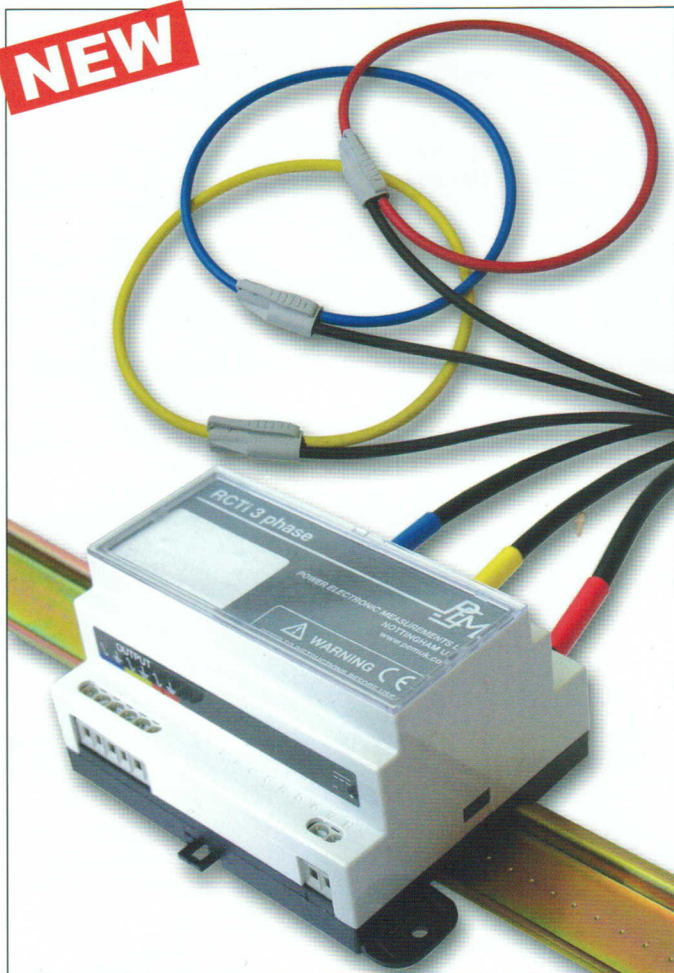

**NEW**

- **easy to retrofit** - the coil is small, light weight, and its length can be specified independently of the size of measured current
- **does not suffer from magnetic saturation**
- **non intrusive** - the coil draws no power from the circuit under test
- **no danger of open circuit secondaries**
- **low phase shift** at power frequencies (50/60Hz) and above
- **wide-bandwidth 0.6Hz to 800kHz** for measurement of sub and higher frequency harmonics and complex waveforms
- **a single enclosure and power supply cable for three channels**

### Specifications

Rated current	500 A 1,000 A 2,500 A 5,000 A 10,000 A 25,000 A 50,000 A
Rated Output (Full scale FS)	±5.0Vrms (±7.07V peak)
Output limit	150% FS (±10.6V peak)
Supply voltage	12Vdc (-10%) at 150mA <b>-to-</b> <i>Wide supply range</i> 24V (+20%) at 50mA
Operating temperature range	-5°C to +65°C
Bandwidth (-3dB)	0.6Hz to 800kHz
Phase shift @ 50Hz	0.9±0.1 degrees
Accuracy	±1.0% of reading (5% to 150% FS, 25°C)
Temperature coefficient	-0.01 (coil) ±0.012 (integrator) % / °C
Output load	> 10.0kΩ

### Features

- **Traceable calibration**
  - Every transducer is supplied with traceable calibration at 50Hz
  - Due to the excellent linearity of Rogowski coils (<0.05%) the calibration is maintained throughout the current range
- **Fully isolated measurement**
  - Power supply isolated to 1kVrms
  - Rogowski coil insulated to 2kV peak. Established by a standard 'flash test' at 4kVrms, 50Hz for 60 seconds
- **Easy to install, flexible, 'clip-around' coil sensor available in three standard lengths**
  - 300mm (11.8"), 500mm (19.7") and 700mm (27.6")
  - Custom lengths available on request
- **1m cable connecting the coil to the electronic integrator**
  - Custom lengths available on request
- **Small DIN rail or panel mount electronics enclosure**

### Customising the RCTi-3ph

For specifications outside those detailed on the specification sheet please contact PEM e.g.


- Phase error requirements at different frequencies
- Extended coil / cable lengths
- Further current / output ratings
- Customised frequency response

### Standards and Approvals



- CE Marked
- Complies with EN 61010:2001
- PEM Ltd is an ISO9001:2000 registered company
- EMC EN 61326



## Connections

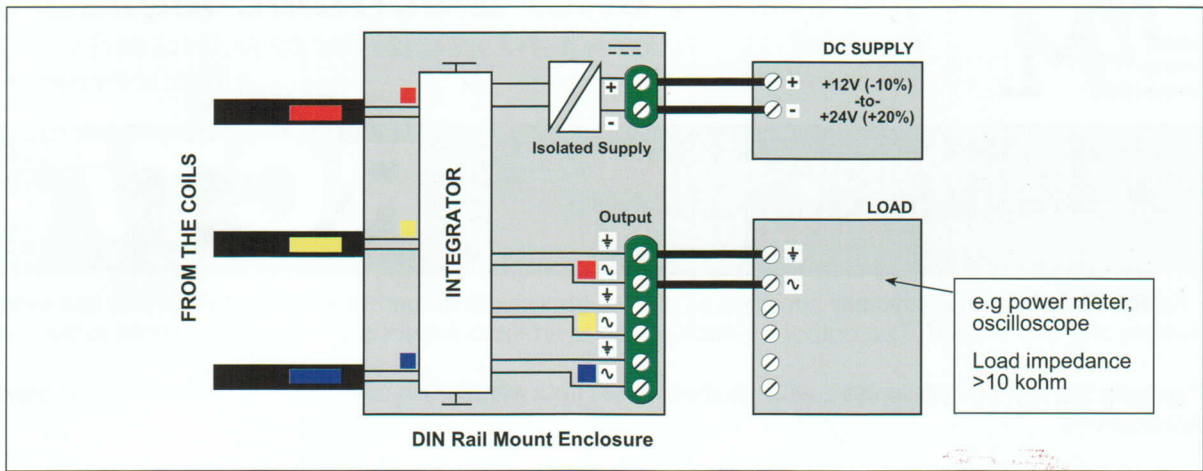

## Order Code

**RCTi-3ph** /  / 

Current range


Coil length

2 - 500 A	300 - 300 mm
3 - 1000 A	500 - 500 mm
4 - 2500 A	700 - 700 mm
5 - 5000 A	
6 - 10000 A	
7 - 25000 A	
8 - 50000 A	

For example a RCTi-3ph / 5 / 700 has a current rating of 5000A and a 700mm (27.6") circumference Rogowski coil. It requires a +12 (-10%) to +24V(+20%)V dc supply.

Customised versions are available on request. If your requirement is outside that listed in this datasheet please contact Power Electronic Measurements Ltd.

## Dimensions

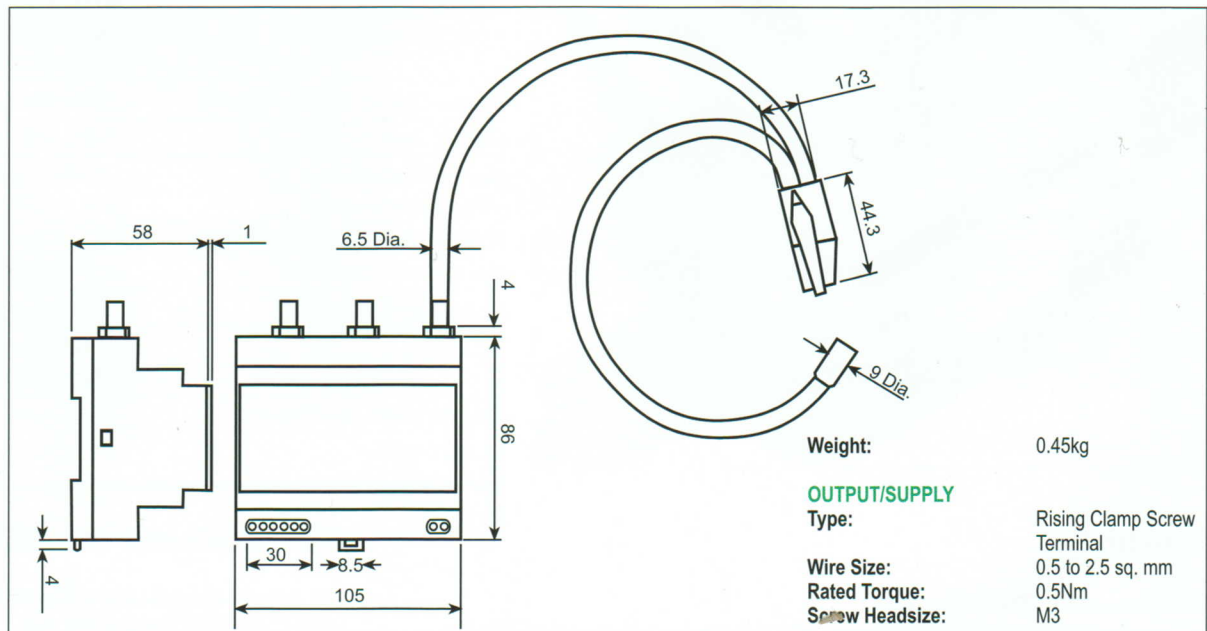

## Further information

Further technical advice available at [www.pemuk.com](http://www.pemuk.com). For all questions, queries or specifications outside those listed please contact Power Electronic Measurements Ltd.



**Power Electronic Measurements Ltd**

Tel: 00 44 (0)115 9254212 • Fax: 00 44 (0)115 9677685 • Email: [info@pemuk.com](mailto:info@pemuk.com)  
Web: [www.pemuk.com](http://www.pemuk.com) • Nottingham, UK

Available from July 2006