


DRAWING NUMBER
DS48865


DATA SHEET



USED ON

D or CAT No

M.A/S.A

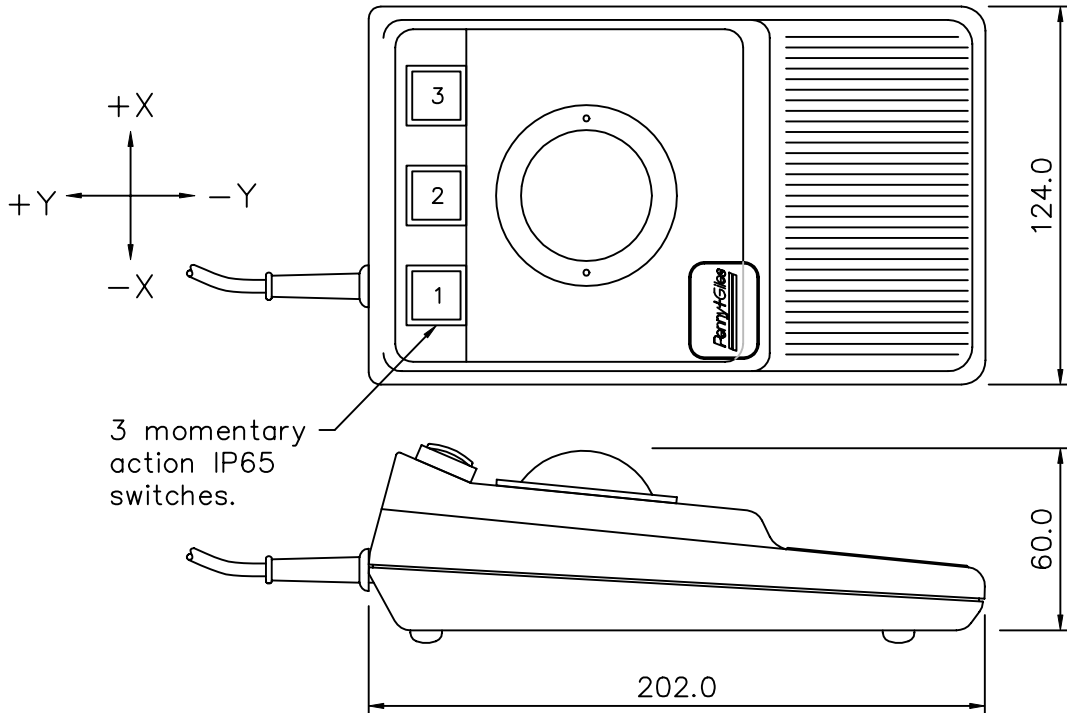


3 momentary action IP65 switches.

Specification

- Case ~ A.B.S, colour: grey.
- Ball ~ $\phi 2.0$ " colour: yellow.
- Top Ring ~ P.T.F.E. ball seal/restraining ring.
- Cable ~ 3 mtrs, pvc sheath, colour: grey.
- Connector ~ 6 way mini din plug.
- Supply ~ +5V d.c. $\pm 5\%$ @ 50mA max.
- Output ~ PS2 auxiliary input compatible, format 26.

Connection Details

Pin	Description	
1	Data	(Brown)
2	N/C	-
3	0V gnd	(Red)
4	+5V	(Orange)
5	Clock	(Yellow)
6	N/C	-
All other pins N/C		



Connector looking on open end.

ISSUE	1	1B	1C				
DATE	26.3.96	24.1.00	11.6.02				
CHANGE	CH560	ECN0698	ECN947/981				
MATERIAL	-		FINISH	-		TOL.	
						± 1.0	
APP						SCALE	NTS
						DIMS	mm



Penny & Giles Computer Products
Ringwood, Hampshire. BH24 1EU.
Tel: +44 (0) 1425 463100
Fax: +44 (0) 1425 463111
www.penny-gilescp.co.uk

DRAWN
R.HARNETT


TITLE
PROTECTED DESK TOP
TRACKERBALL (TBDA/50/P1/PS2)

SIZE
A4

DRAWING NUMBER
DS48865

DRAWING NUMBER
DS48108


DATA SHEET



USED ON

D or
CAT No

M.A/S.A

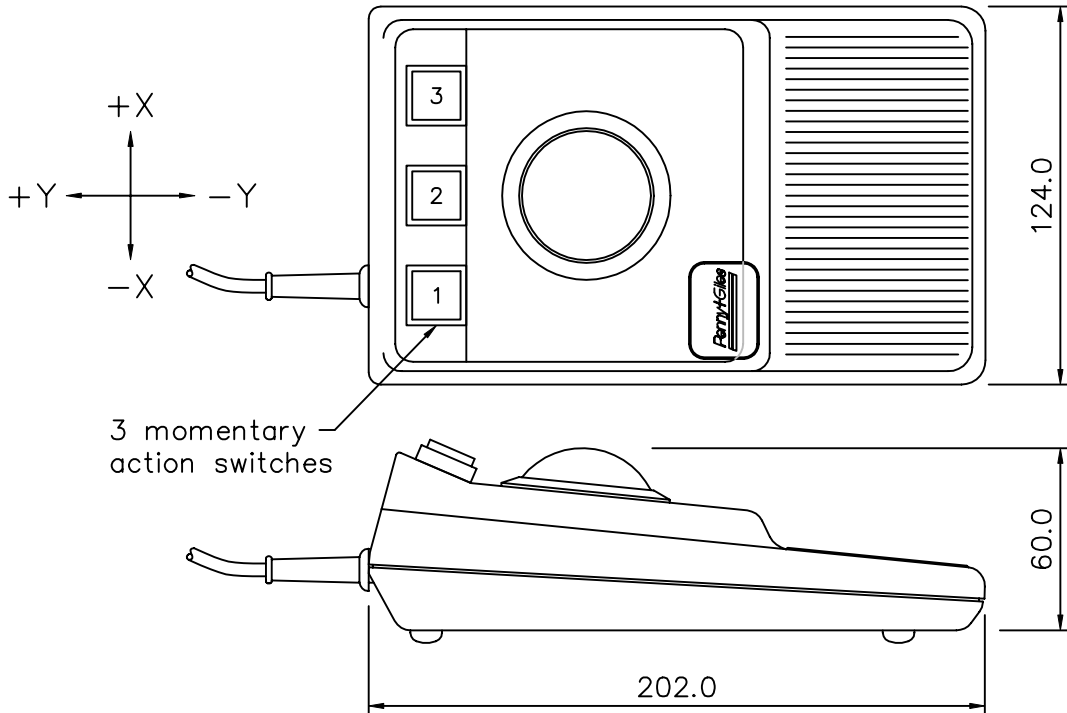


Specification

Case ~ A.B.S, colour: grey.
 Ball ~ $\varnothing 2.0$ " colour: yellow.
 Cable ~ 3 mtrs, pvc sheath, colour: grey.
 Connector ~ 6 way mini din plug.
 Supply ~ +5V d.c $\pm 5\%$ @ 50mA max.
 Output ~ PS2 auxiliary input compatible, format 26.

Connection Details

Pin	Description
1	Data (Brown)
2	N/C -
3	0V gnd (Red)
4	+5V (Orange)
5	Clock (Yellow)
6	N/C -



Drain wire connected to shell of plug. Connector looking on open end.

ISSUE	4	4A	4B	4C	4D	4E	
DATE	26.5.93	16.8.94	15.12.95	13.5.96	17.2.98	19.11.01	
CHANGE	CH81.5	CH81.6	CH81.7	CH81.8	ECN0698	ECN0947	
MATERIAL	-		FINISH	-		TOL.	
						± 1.0	
APP						SCALE	NTS
						DIMS	mm



Penny & Giles Computer Products
 Ringwood, Hampshire. BH24 1EU.
 Tel: +44 (0) 1425 463100
 Fax: +44 (0) 1425 463111
www.penny-gilescp.co.uk

DRAWN	TITLE	SIZE	DRAWING NUMBER
R.HARNETT	2" PS/2 DESK TOP TRACKERBALL	A4	DS48108